


# Flametech Service

## Gas Fireplace Repair

### Pilot Lighting Instructions

1. Open damper & turn on gas supply to fireplace.
2. Turn control knob to the pilot position (typically a center or upward position) *\*\*See Diagram #1 Below*
3. At pilot position, gently push the control knob in (the knob should depress approximately a ¼" to a ½").
4. Locate the pilot burner area (typically found between the front and back log near the right side of gas log unit). *\*\*See Diagram #2 Below*
5. While pushing in on the control knob, insert a long match or BBQ lighter into the pilot burner area. Soon a small pilot flame should appear.
6. After the pilot has been lit, continue to hold the control knob in for one to two minutes.
7. When the control knob is released, the pilot flame should continue to burn. If the pilot flame goes out, repeat the steps above.
8. Your pilot should now be lit, adjust the control knob a ¼" turn counter clockwise to ignite your gas log's main burner.

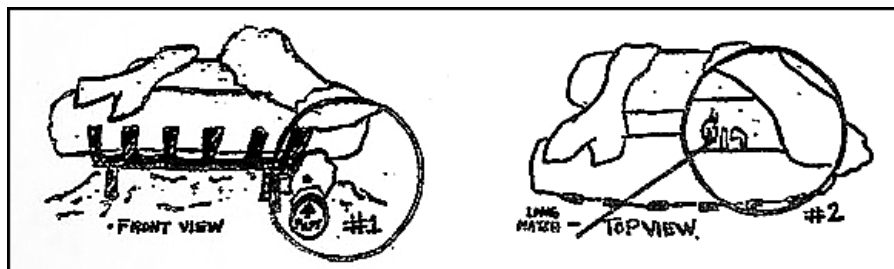

We Service All Makes & Models Of Gas Log, Direct Vent & Vent Free Fireplaces.

Proudly Serving Southeastern Michigan Since 2000.

248.544.6877

[www.FlametechService.com](http://www.FlametechService.com)